




KTR-.00 FA
KTR-.01 FA




D [mm]
20, 30, 40, 50



d [mm]
6; 8; 10



C [daN]
8 - 20




T [°C]
0° - 80°



KTR-.00/.01 FA						
Type	Normal .00	Stainless .01	Di +0,25	Da	d	Load Rating C [daN]
KTR-20x1,5	x	x	17,1	19,9	6	8
KTR-30x1,8	x	x	26,5	29,9	8/10	10
KTR-40x2,3	x	x	35,5	39,9	8/10	10
KTR-50x1,5	x	x	47,3	49,9	8/10	20
KTR-50x2,8	x	x	44,6	49,9	8/10	20

Other dimensions on request!

- ☛ Housing: Plastic
- ☛ Inner Race: Plastic
- ☛ Ball Cage: Plastic
- ☛ Shaft: Plastic
- ☛ Bearing Flange: Plastic
- ☛ Ball, Spring
 - ☛ 00: Steel
 - ☛ 01: 1.4034

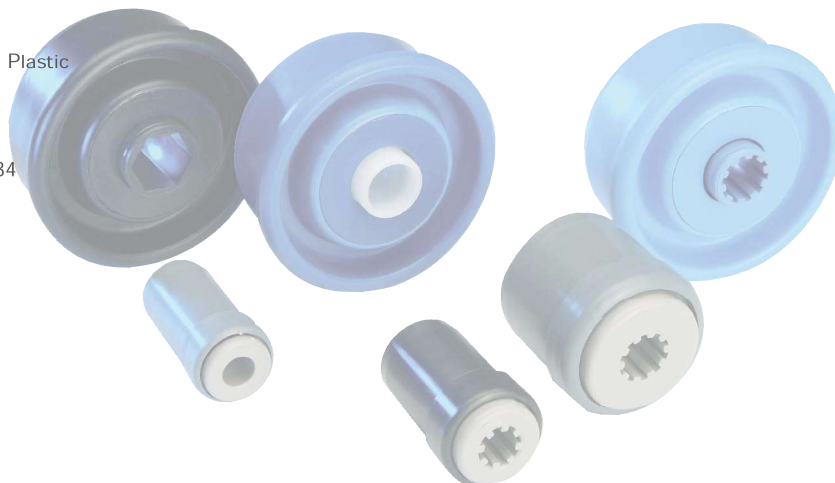

Carton [pcs.]

ø20: 400
ø30: 250/500
ø40: 250/500
ø50: 200

KTR